

ROUGH-IN TEMPLATE FOR 1XXX DUAL FOUNTAIN


DRAWING: 0510002256
REVISION: 1

REFER TO O&M FOR COMPLETE DETAILS

SCALE: 12 INCHES

2X6 MIN HEADER
 (BY OTHERS)

FRAMING (BY OTHERS)

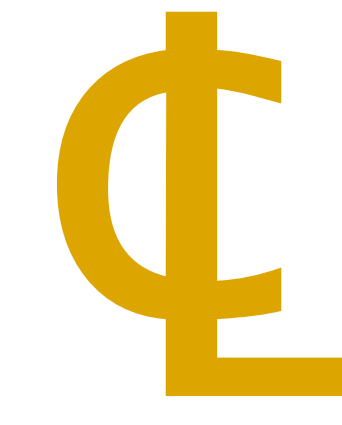

WALL OPENING 37 1/4 MIN [946 MIN]

WALL OPENING 47 7/8 MIN [1216 MIN]

HIGH SIDE DRAIN LOCATION
 (1-1/4" WASTE BEND)

FOUNTAIN MODELS

- 1119: 33-3/4" [857]
- 1011: 33-1/2" [851]
- 1117: 32-13/16" [834]
- TO FINISH FLOOR

LOW SIDE DRAIN LOCATION
 (1-1/4" WASTE BEND)

FOUNTAIN MODELS

- 1119: 28-1/4" [718]
- 1011: 28" [711]
- 1117: 27-5/16" [694]
- TO FINISH FLOOR

DRYWALL HEIGHT FOR REAR ACCESS
 VERSIONS ONLY

25 1/4 [641]

18 5/8 [473]

5 3/8 [136]

CENTER OF ELECTRICAL
 JUNCTION BOX
 (SUPPLIED, PART OF FRAME)
 (120V 15A GFCI-PROTECTED
 CIRCUIT)

RECOMMENDED
 WATER SUPPLY
 LOCATION
 (1/2" IPS)

1 1/8 [29]

24 13/16 [631]

1 11/16 [44]

23 1/2 [597]

HCR8 ELECTRICAL
 LOCATION
 (120V 15A
 GFCI-PROTECTED
 CIRCUIT,
 IF EQUIPPED)

11 11/16 [296]

TO FINISH FLOOR (4.0) [102]

*FINISHED FLOOR ELEVATION
 FOR STANDARD ADA
 COMBINATION HI-LO UNITS.

TRIM THIS AREA AWAY TO JUST BELOW THE LINE ABOVE.

TRIM THIS AREA AWAY TO JUST BELOW THE LINE ABOVE.